



Morphometric Analysis of River Donga Watershed in Taraba State Using Remote Sensing and Gis Techniques

**Adelalu, Temitope Gabriel^{1*}, Yusuf, Mohammed Bakoji¹, Ibrahim Abdullahi¹
and Idakwo Victor Iko-Ojo²**

¹Department of Geography, Taraba State University, Nigeria.

²Modibbo Adama University of Technology, Yola, Nigeria.

Authors' contributions

This work was carried out in collaboration among all authors. Author ATG designed the study, performed the statistical analysis, wrote the protocol and wrote the first draft of the manuscript. Author IVIO managed the analyses of the study. Authors YMB and IA managed the literature searches. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/JGEESI/2019/v20i330106

Editor(s):

(1) Dr. Pere Serra Ruiz, Department of Geography, Universitat Autònoma de Barcelona, Spain.

Reviewers:

(1) S. V. K. V. Mandadapu Prasad, Jawaharlal Nehru Technological University, India.

(2) Manish Giri, MIT Academy of Engineering, India.

(3) T. O. Ogunbode, Bowen University, Nigeria.

Complete Peer review History: <http://www.sdiarticle3.com/review-history/48219>

Original Research Article

Received 12 January 2019

Accepted 01 April 2019

Published 12 April 2019

ABSTRACT

As climate change infiltrate and influence every sphere of the globe, the continuous study of the drainage features and assessment of the drainage basin as a fundamental geomorphic unit in water resources development and management cannot be relegated. This work has considered the analytical description of the physical division of RDCA. The three domains of the morphometric parameters (linear, areal, and relief aspects of the basin) were considered for the analysis. Remote sensing and GIS techniques were adopted in the analysis of the data using hydrological and surface tool in ArcGIS 10.2. The acquired SRTM DEM was used to delineate the catchment area and major morphometric parameters were estimated. The results show that the basin is elongated with low lemniscate ratio. RDCA is a 7th order drainage basin, with an area of 11,355 km², having a

*Corresponding author: E-mail: topeadelalu@gmail.com;

length of about 164 km². Value of drainage density indicates moderate runoff potentials. Stream frequency, bifurcation ratio and constant channel maintenance indicate medium permeability and that the basin produces a flatter peak of direct runoff for a longer duration. Channel encroachment, land use and land cover change seems the cause of perennial flooding in the region than change in drainage features. This study provides scientific database for further comprehensive hydrological investigation of RDCA around which Kashimbilla dam is located.

Keywords: Catchment area; GIS; morphometric parameters; river Donga; water resources development and management.

1. INTRODUCTION

Information on the morphometric parameters is pivotal to the management of water resources of any watershed. Watershed, catchment area, or drainage basins are often used interchangeably. Watershed is a contributing area from which all precipitation flow to a pour point. It is the upslope area serves of water flow to a common outlet as a concentrated drainage. Watershed provides platform within which physical processes pertinent to the general hydrology of the drainage basin may be considered [1]. Information about the watershed is useful for many fields such as forestry, agriculture and regional planning. A Morphometric characteristic of hydrologic and geomorphologic processes gives the information about the watershed formation in different scale [2]. Management of any watershed depends upon its accurate delineation and plays an important role in the determination of the stream flow. Systemic delineation of the geometric of a catchment and its stream channel requires measurement of linear aspects of the drainage network, areal aspects of the drainage basin, and relief aspect of the channel network and contributing ground slopes [3]. Knowledge of how water flow across a drainage basin and how changes in that area with time may affect the flow are required for successful operation of water resources and environmental planning and management of the basin. It has long been observed that the maximum flood discharge per unit area is inversely related to the size of the basin. [4], added that the runoff of different catchment area and the geomorphologic structure are sensitive and its changing nature was controlled by runoff. However, quantitative information like these, especially, pertaining to drainage morphometric that influence flood (drainage density, drainage frequency, meandering ratio, stream order and bifurcation) germane to proper planning of a catchment especially on River Benue tributaries in the study area has not been carried out despite the fast opportunities GIS techniques avail.

The data integration functions provided by GIS which allow the linking of information from different fields of studies have led to a much wider use of satellite imageries from remote sensing in mapping and morphometric analysis of river basins. In the past, drainage morphometric parameters were extracted from the topographical maps or field surveys. This type of study was characterized by inaccuracies and disparities. In short, one can now say that the advent of GIS and remote sensing techniques has rolled away the nineteen century's ache associated to non-conventional studies of the river basins into dungeon of forgetfulness. Research works on derivation of flood potential using morphometric characteristic and the shape indices using the integration functions by GIS has been carried out by a number of researchers in different environments and it has proven to be an accurate scientific tools for drainage basin characterization outside the nation [5,6,7,8,9].

In Nigeria, drainage and morphometric characteristics of some river basins have been studied using GIS and remote sensing techniques: Ogunpa and Oghere drainage basin [10]; Calabar river basin [11]; Osun drainage basin [12] river Oyun, Asa, Gongola, Kastina, [13]. River Donga is one of the three major tributaries of River Benue in Taraba. Despite its water resources potential vital for socio-economic development of the region and Taraba state at large [14], there is no available literature regarding the characterization of this river in the State to aid in the development, management and sustainability of the basin. This research work attempts evaluation of the morphometric parameters of River Donga in Taraba State Using Geographical Information System (GIS) techniques.

2. STUDY AREA

River Donga is one of the promising tributaries of River Benue in Taraba State. This river transport

rainwater with huge amounts of sediments through the town. Donga town is one of the oldest LGA in the State. It is roughly located between latitude $7^{\circ}43' 00''$ N $10^{\circ}03' 00''$ E and longitude 7.71667° 10.05000° E (Fig. 1) Its river basin covers an area of 11355km^2 . River Donga is characterized by several minor catchments of about 1,135,498 hectares [15]. These Sub Basins include among others Ntum, Luggungo, Mbasoand Ngo. Its sources are from Tsabga hill, which has an altitude range of 4,500 – 5,000 meters above sea level [14]. It flows southwest to other parts of the State with a volumetric flow remaining considerable even in the low water period [14]. This makes these area water resources potential for socio-economic development. However if not properly harness can boost vulnerability of such area to flooding [15].

The land surface is generally undulating with high altitude in the south-eastern part and low altitude in the north, west and southern parts of the catchment. The south-eastern part of the catchment is characterized by considerable doomed hills and intervening flat topped ridges. River Donga drains five local governments in

Southern Taraba before emptying to River Benue at the Western part of the State. The LGA which are drained include Kurmi, Ussa, Takum, Wukari, and Donga. These areas are potential to flooding and again could be potent when impaired by encroachment through human activities along the bank [15]. More so, the Donga system have several minor basins characterized by rising water volume which can cause back flow and consequently propel flooding of several places in the region [14]. The average rainfall and runoff over the basin are 2102 mm and 1123m^3 respectively. The land use pattern within the catchment area includes that of residential/ settlements, built up areas, bare land/soil surfaces, farmlands, vegetation, rock outcrop and water bodies. The region is endowed with fertile land for cultivation of staple crops. Major crops popularly grown in this area among others include sugar cane, rice e.t.c. However incessant flooding of farm land is a common challenge to rural farmers in this agrarian region. This is however not inevitable considering the pattern and stream networks of the region. To convert this resistance to resources, the federal government has embarked on dam construction in the region.

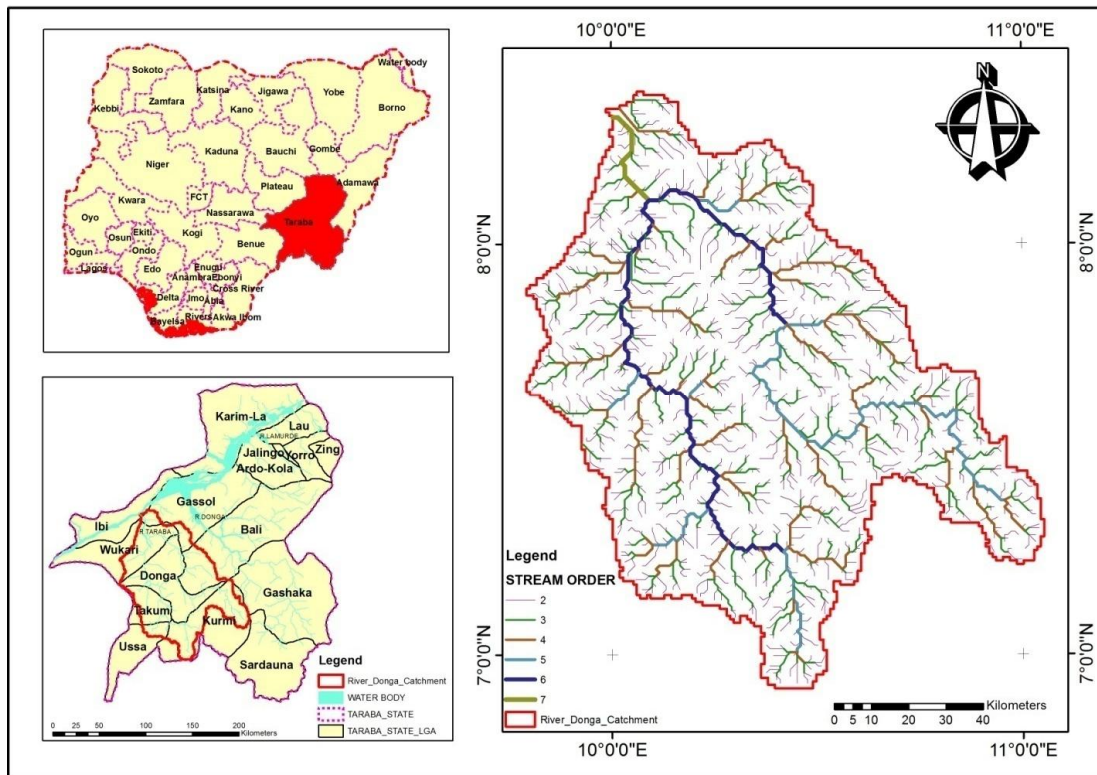


Fig. 1. RDCA in Taraba State

3. MATERIALS AND METHODS

digitizing 1: 50,000 toposheets: (194 & 195, 255 & 256) that capture the basin.

3.1 Materials

The data explored for the actualization of the objective of this work include: (i) 30 m resolution Digital Elevation Model (DEM) of the catchment area of Donga River. This was acquired from the Shuttle Radar Topographic Mission (SRTM) available for the globe and downloaded from <http://srtm.usgs.gov/data/obtaining.html>. (ii) Soil image was obtained from Digital soil map of the world (DSMW) from <http://Worldmap.harvard.edu/data/geonade.html> (iii) The digital layer of geological condition of the catchment area were obtained from harmonization of the works from Federal surveys of 1959 and the Geological Survey of Nigeria in 1985 by

3.2 Methods

Importing the DEM of the study area into GIS environment, the generation of depression less DEM is the first task for morphometric analysis of a drainage basin [4]. Basin area derivatives such as basin area, basin perimeter, basin length, stream length and order were extracted directly from the DEM using hydrology tool under Spatial Analyst Tools in ArcGIS-10. Method for delineating the basin followed a series of these sequences: DEM, fill, flow direction, watershed, and stream order. From these, other domains of the morphometric parameters such as bifurcation ratio, stream frequency, drainage density,

Table 1. Data used for the study

S/N	Type	Format	Date	Source
1	Elevation Map	Digital	2015	SRTM DEM
2	Soil Map	Digital	2015	Worldmap.harvard.edu/data/geonade.
3	Land-Sat 8 (Thematic Mapper)	Digital	2015	USGS Explorer
4	Slope Map	Digital	2015	SRTM
5	Drainage Map	Digital	2015	SRTM

Source: Compiled by the Authors

Table 2. Formulae used to compute morphometric parameters and their references

Morphometric parameters	Methods	Reference
Linear aspects		
Stream order (U)	Hierarchical rank	[3]
Number of Streams (Nu)	$Nu = N_1 + N_2 + \dots + N_m$	[17]
Stream length in km (Lu)	$Lu = L_1 + L_2 + \dots + L_m$	[17]
Mean stream Length (L_{um})	$L_{um} = Lu / Nu$	[3]
Bifurcation Ratio (R_b)	$R_b = Nu / Nu + 1$	[18]
Stream length Ratio (R_L)	$R_L = Lu / Lu - 1$	[17]
Areal aspects		
Area in km^2 (A)	Area calculation	[18]
Perimeter in km (P)	Perimeter calculation	[18]
Length of the basin in km (L_b)	Length calculation	[18]
Drainage density (D_d)	$D_d = Lu / A$	[19]
Stream frequency (F_s)	$F_s = Nu / A$	[19]
Circulatory ratio (R_c)	$R_c = 12.57 * (A / P^2)$	[20]
Elongation ratio (R_e)	$R_e = 2 / L_b * \sqrt{A / \lambda}$	
Form factor (F_f)	$F_f = A / L_b^2$	[19]
Drainage intensity (I_d)	$I_d = F_s / D_d$	[21]
Length of overland flow (L_o)	$L_o = 1 / D_d * 0.5$	[17]
Relief aspects		
Basin relief in m (H)	$H = Z - z$	[22]
Relief ratio (R_h)	$R_h = H / L_b$	[18]
Relative Relief (R_{hp})	$R_{hp} = H * 100 / P$	[23]

Source: Compiled by the Authors

drainage texture, elongation ratio, circulatory ratio, lemniscate ratio, form factor among others were computed. The methodologies employed for the computation of all the morphometric parameters are tabulated in Table 1. The map obtained from Geological Survey of Nigeria that capture the RDCA was georeferenced to WGS 1984 zone 31 and digitized. The shape file from the delineated basin of RDCA was then overlaid on the digitized map.

The soil image file from DSMW was loaded through Arc Catalog and Arc Map. The intention was to add the raster file of the DSMW. The raster soil map was projected to WGS 1984 and the soil attributes was added using the join command. The re class tool was used to reclass the new raster map. (The reclass tool was used to reclassify the new raster map) Other necessary steps were taken and at the end the catchment shape file was overlaid on the new raster that contain the soil texture to extract the soil of the study area. Basic infiltration rate for the various soil types and its influence on flood flow was considered following the Minnesota storm water manual prepared based on the review of about thirty guidance manuals and close to about two hundred published articles on infiltration rate (Table 2). The soil infiltration rates suggested in the manual are as follows: Clay,

sandy clay loam, sandy loam, and loam sand has- 1.524 mm/hr, 5.08 mm/hr, 20.32 mm/hr and 20.32/ mm respectively [16].

4. RESULTS AND DISCUSSION

4.1 Soil and Hydrology of RDCA

Information on the soil of the study area based on the textural composition from 0-30 cm depth, using the harmonized world soil database version 1.2 downloaded from <http://Worldmap.harvard.edu/data/geonade.html> depicts five different soil types on the basin (Fig. 2). Among these are Numic Nitosols, Lithosols, Fluvisols, Ferric Luvisols and Ferric Acrisols. From the digital map, more than half of the land areas of the study catchments support Acrisol. Acrisols form an old landscape, as classified by the Food and Agriculture Organization of the United Nation (FAO). Ferric Acrisols and Ferric Luvisol which form about 66% of the geologic basement are clay-rich and are associated with humid, tropical climates. The soil infiltration rate suggested in the [16] for clay 1.524 mm/hr. [16] which was prepared based on the review of thirty guidance manuals and close to two hundred articles on infiltration rate hinged the inference for this study. The soil infiltration rates suggested in the manual are as follows: clay, sandy clay

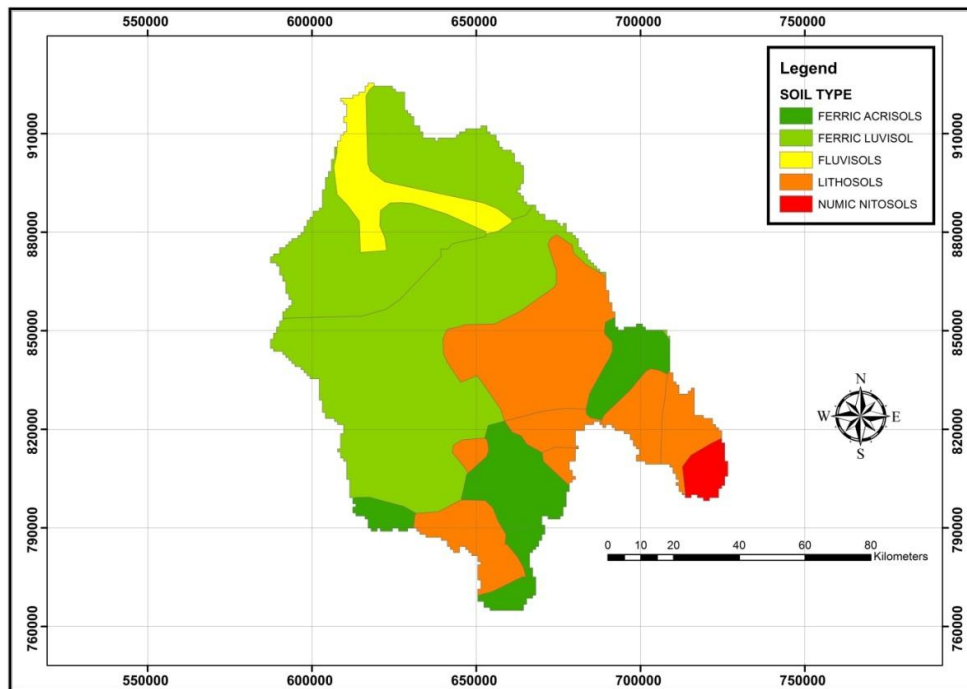
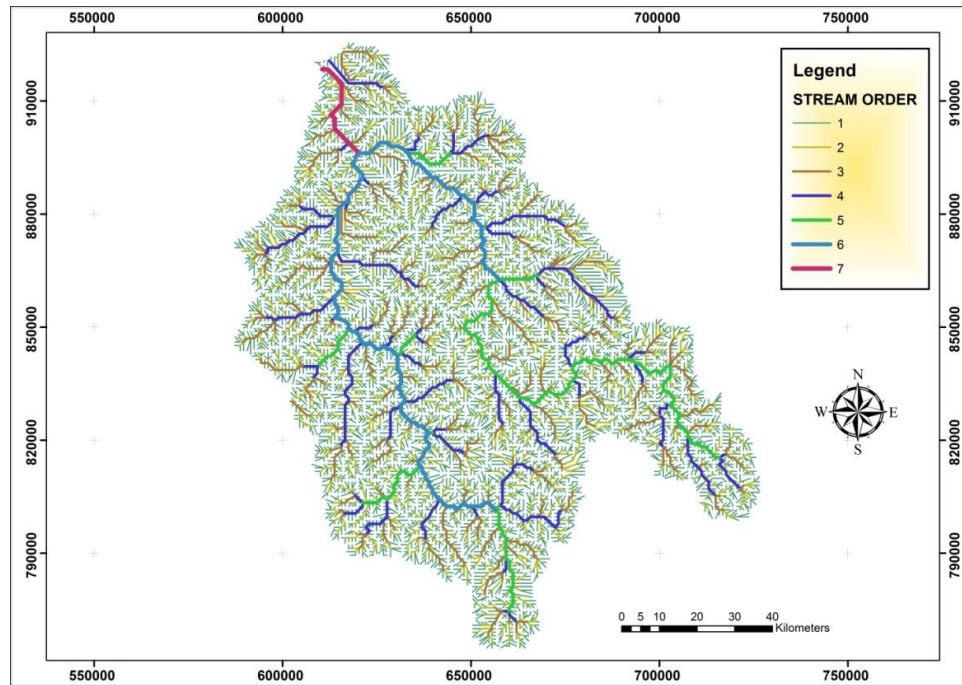


Fig. 2. River donga basin soil

Table 3. Soil type and percentage covered in RDCA

Soil type	Area (km ²)	Percentage
Ferric Acrisols	1377.674015	12.13
Ferric Luvisol	6096.982828	53.69
Fluvisols	671.959983	5.92
Lithosols	3023.124682	26.62
'Numic Nitosols'	185.293719	1.63
Total	11355.03523	100

**Fig. 3. Stream order of RDCA**

loam, sandy loam, and loam sand has- 1.524 mm/hr, 5.08 mm/hr, 20.32 mm/hr and 20.32/ mm respectively. Next to this soil type as typified from the database is Lithosols. This is a shallow soil consisting partially weathered rock (parent material). Just like pavement, it neither hold runoff nor support infiltration [24], and this type of soil account for about 27% of the catchments terrain in the study area. This has implication on the hydrology of the basin of the study area. A soil with low infiltration rate with a region of continuous incremental torrents will produce flood events. A low rainfall rate and high infiltration extensive un-encroached basin may not produce any flooding event. The rate of infiltration and overland runoff are also influenced by other factors like land use and land cover, basin characteristics such as slope, drainage density, elongation ratio. Also rainfall characteristics such as intensity, amount and duration are factors of consideration for

infiltration and overland flow discuss. Suffice to say that soil type/texture in isolation is not enough factor to explain the process of the basin hydrology. Fig. 2 shows the soil map of RDCA

4.2 Linear Features of RDCA

Linear feature is a measure of the axial divides, links and layout of the stream and the basin. The analyzed basin network of RDCA is presented in Fig. 3. Table 3 shows the results of the linear features of morphometric parameters.

4.2.1 Stream order, stream number (N_u) and bifurcation ratio (R_b)

Subdivision of stream channel networks into individual lengths of channels and the hierarchical arrangement or order of magnitude of such is termed stream order [25]. There are many ways of stream ordering, but that proposed

by Strahler [3] which is a modification of Horton [17] original method is adopted for this work. The highest order obtained using the DEM is 7th order and hence the basin is designated as 7th order drainage basin. In all, the total number of stream in the basin is five thousands eight hundred and seventeen (5817). The maximum number of streams (4762) was found in the first order. Also as earlier noted by pioneering researchers and generally observed in many studies today in the field of quantitative geomorphology, as the stream order increases, the number of streams decreases Table 3. Fig. 3 shows different stream orders in the R DCA networking a total area of about 11,355 km².

Bifurcation (R_b) is the ratio of the number of segments of a given order to that of the segments of the next higher order. The bifurcation ratio of (RDCA) ranges from 2 to 6.05, with an average of 4.33. Strahler [3] had earlier posited that bifurcation ratios ranging from 3 to 5 is an indication of a characteristic of a catchment area which have experienced minimum structural changes. It is an indication of a natural drainage basin system underlain with a homogenous rock [26]. River Donga catchment area's bifurcation ratio shows that the region present drainage pattern is still somehow in the natural drainage system characterized with a homogenous rock that has not experienced serious structural changes (Table 4). The bifurcation ratio of RDCA clearly can be grouped into low (stream order 7) and high (stream order 1-6). The R_b neither show increasing nor decreasing order from one order to the next order. These irregularities are associated to geological and lithological development [3]; or transitional zone of geological structure of the drainage basin [27]. Chorley et al. [28] has observed that the lower the bifurcation ratio, the higher the risk of

flooding, particularly of parts and not the entire basin. In the present study, stream order 7 has the lowest R_b . Google Earth search and ground truthing during the field work reveal two vulnerable wards along this stream order: Gyata Aure and Fada communities. This confirms the reason why Gyata Aure and Fada communities at the mouth of the basin suffer perennial flooding. However, the higher R_b values of the other parts of the catchment (3.69-6.05) and the presence of the elongated shape would give room for a lower and extended peak flow, which will curtail the risk of flooding in major parts of the catchment area of river Donga.

4.3 Areal Aspects of RDCA

The area (A) and the perimeter (P) of a basin are pivotal in quantitative geomorphology. Other areal aspects derivative of A and P include length of the basin (Lb), Drainage density (Dd), Stream frequency (Fs), Circulatory ratio (R_c), Elongation ratio (Re), Form factor (Ff), Length of overland flow (Lo) . The areal aspects values for River Donga Catchment area (RDCA) were calculated and the results are presented in Table 5. The area and the perimeter of Donga River Basin are 11355km² and 727km, respectively.

The length of the basin (Lb) has been defined by many researchers in the field of geomorphology. Pioneer subscriber, [19], define basin length as the straight-line distance from a basin mouth to the point on the water divide intersected by the projection of the direction of the line through the source of the main stream. It is the longest dimension of the basin parallel to the principal drainage line [18]. The calculated length of RDCA in accordance with the definition of Schumm [18] was 164km.

Table 4. Summary of the drainage basin parameter in the study area

Stream order (U)	No of streams (Nu)	Total stream length (Lu) km	Mean stream length in Km (Lum)	Bifurcation ratio (Rb)	Stream length ratio	Length of overland flow
1	4762	9515.85	1.99	-	0.26	4.88
2	787	2513.44	3.19	6.05	0.47	
3	213	1050.11	4.93	3.69	0.52	
4	43	543.54	12.64	4.95	0.44	
5	9	239.55	26.62	4.78	0.87	
6	2	208.19	104.10	4.50	0.14	
7	1	29.43	29.43	2		
Total	5817	14099.76				

Source: Authors' Data Analysis

Table 5. Area features of RDCA

Basin area (km²)	Basin perimeter (km)	Basin length (Km)	Form factor (Ff)	Drainage density (Dd)	Stream frequency (Fs)	Circulatory ratio (R_c)	Elongation ratio (Re)	Form factor (Ff)	Length of overland flow (km)
11355.04	727.40	164.0	0.42	1.24	0.51	0.27	0.73	0.42	4.88

Source: Authors' Data Analysis

Horton, R. E [19] defined Drainage density (Dd) as the ratio of total length of streams of all orders within the basin to the basin area, which is expressed in km/km^2 . He added that it is an indication of the closeness of spacing of channels. Dd can span from 1- $5\text{km}/\text{km}^2$ in an area where slopes are gentle, where rainfall are low with present of permeable bedrock, to about $500\text{ km}/\text{km}^2$ in mountainous areas where slopes are steep, where rainfall total are high with impermeable rocks [29]. The Dd of the RDCA is $1.24\text{ km}/\text{km}^2$. This indicates a low Dd. [30] submitted that a low Dd resulted from a permeable land surface with less slope and good number of vegetation cover in the basin. As shown in Fig. 4. The results of the land use analysis performed for the basin revealed that the basin has 61% natural vegetation cover and 39% cultivated area and this provides the evidences for a low Dd value in the catchment area. Presence of good vegetation cover can influence drainage density. This creates biding force at the root zone thereby encouraging high infiltration capacity. High infiltration brings about slow respond to storm rainfall and as a result reducing the rate of overland flow consequently low Dd.

What factors then could be responsible for the perennial flooding in this region? It is clear that the area has no adequate documented climatic data especially rainfall. Available projected data downloaded from usgs. Worldclim and the record from the respondents in the work from [31] posited that in less than two decades, built-up and bare land have been increased by 4% (137.7021 km^2), and 12% (409.8324 km^2) while vegetation, water body and rock outcrop have decreased by 16% (541.1142 km^2), 0.08% (2.5924 km^2) and 0.1% (3.8279 km^2) respectively. They added that even though only 8% of the respondents adduced flooding to change in land use and land cover, the analyzed imageries show that between the spaces of 16 years, the present built up area is fifth times of the capture in the year 2000 and that 16% of the vegetation cover has disappeared for other use. Based on the interview conducted, 93% of the respondents are attestants to the fact that flooding is on the increase and that 47 and 37% affirmed that increase in rainfall intensity and flood plain encroachment are the major cause respectively.

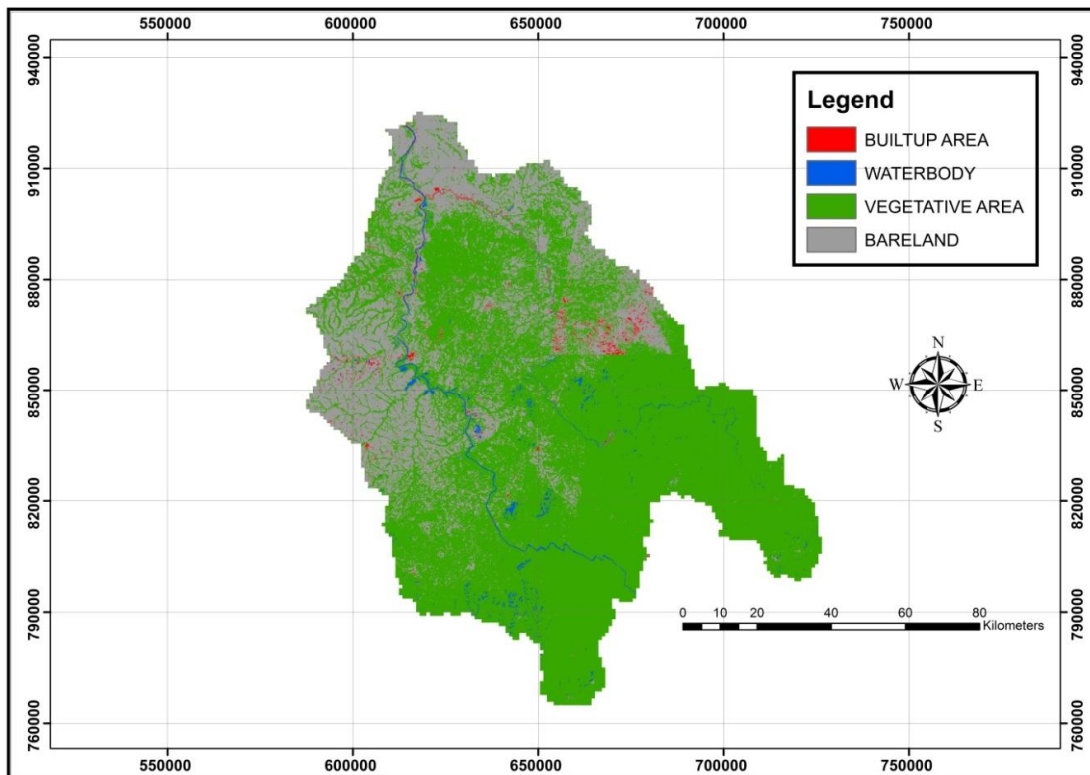
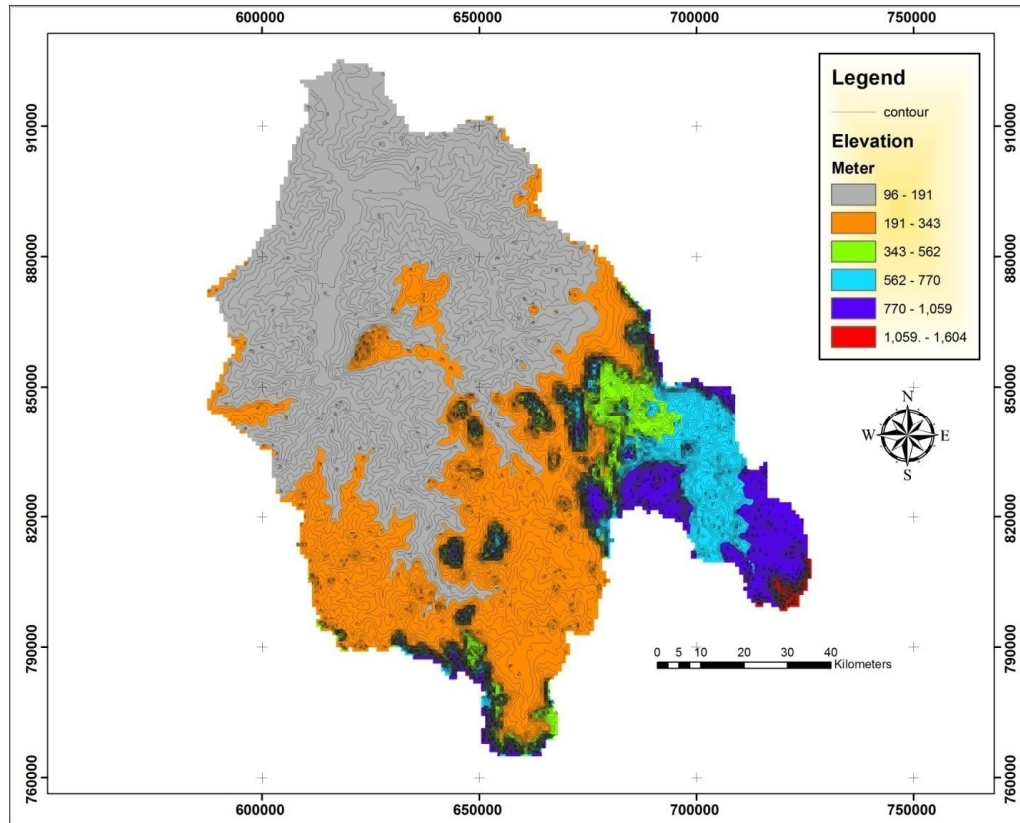


Fig. 4. Land use map of RDCA

Table 6. Relief aspect of RDCA

Maximum height of the basin (m)	Height of the basin mouth (m)	Total basin relief (m)	Relief ratio
1604	96	1508	9.78

Source: Authors' Data Analysis

**Fig. 5. Relief map of RDCA**

Pioneering subscriber in the field of quantitative geomorphology, [19], define Stream frequency (F_s) as the total number of stream segments of all orders within the basin per unit area. F_s is a suggestive of stream network distribution over the river basin. Its value may range from less than 1 to 6 or even more depending on the lithology of the basin [26]. In the present study, F_s of the catchment is 0.51 and it indicates a low value. This is an indication that the catchment possesses a low relief and almost a flat topography [19].

Circulatory ratio (R_c), is a quantitative measure to figure out the shape of the basin. It is expressed as the ratio of the basin area to the area of a circle having the same perimeter as the basin [20]. According to his finding, it is generally influenced by the length and frequency of

streams, geological structures, climate, relief, slope, landuse/land cover of the basin. He described the R_c , of a basin to range from 0.4 to 0.5. [18] added that basin within this range of R_c value is an indication of a basin with strong elongated and highly permeable homogenous geologic base. The lower the value of R_c the less circular the shape of the basin and vice-versa. For this study, the R_c , of this catchment was derived using [20] method. The value of R_c for RDCA is 0.269. It implies that the catchment is somehow less circular in shape, highly permeable and having low discharge of runoff. Possibility of low response to storm rainfall is associated to high storage potential. The hydrograph of the basin will show storage characteristics at first, but later response rapidly to excess rainfall.

Elongation ratio (R_e) is a paramount index in analysis of drainage basin geometry. It is the ratio between the diameter of the circle of the same area as the drainage basin and the maximum length of the basin [18]. Depending on the climatic and geologic types of the catchment of the basin, R_e runs between 0.6 and 1.0 [3]. According to Withanage et al. [32], analysis of elongation ratio indicated that the areas with higher elongation ratio values have high infiltration capacity and low runoff. R_e has been applied also to characterize relief of basin shape. Slope of river basin with elongation ratio (0.9-1.0) circular, (0.8-0.9) oval, (0.7-0.8) less elongated, (0.5-0.7) elongated, (less than 5) more elongated (32). R_e of river Donga is 0.73. R_e values close to 1.0 are typical of regions of very low relief [33]. The R_e of 0.73 is an indicative of elongated basin with low relief.

Form factor (F_f) is defined as the ratio of the basin area to square of the basin length, which reflects the flow intensity of a basin for a defined area [19]. The values of the Form factor normally vary from zero (highly elongated) to unity (perfect circular shape) [34]. Singh et al. [35] submitted that drainage basins with high form factor experience larger peak flows of shorter duration, while basins with low form factors experiences lower peak flow of longer duration. Ashaolu [12] re-affirmed (F_f) benchmark of a basin above which the basin flood flows may be ungovernable and management somewhat difficult. F_f should be less than 0.7854. The form factor of River Donga is 0.422. This indicates that the shape of the catchment is elongated as depicted by the DEM image. It means flow of a lower peak with longer duration hence the basin discharge rate could be manageable.

4.4 Relief feature of RDCA

Relief feature of a basin is a measure of the basin relief, relief ratio, relative relief and ruggedness of a basin. The elevation difference between the highest and the lowest points on the catchment area is called the total basin relief. Schumm [18] define the relief ratio as the ratio of maximum basin relief to the horizontal distance along the longest dimension of the basin parallel to the principal drainage line. It is the expression of the overall steepness of a basin [12], consequently determine the gravity of scouring of the basin and ease of flood flow. Table 6 shows that the maximum height of the RDCA is 1604 m and the lowest is 96 m. The basin relief of the catchment therefore is 1508 m. The maximum relief is found in the South-Eastern part of the

basin close to the source by Tsabga hill. The portions where we have the minimum basin relief coincide with the northern part of the basin. Major areas include part of Wukari, part of Takum, cut across Donga especially GyataAure and Fada town. The relief map of the basin is presented in Fig. 5.

5. CONCLUSION AND RECOMMENDATION

This work has considered the analytical description of the physical division of RDCA. Morphometric parameters of the basin have been computed and analyzed using geo-processing technique of ArcGIS and remote sensing. GIS has proved helpful beyond reasonable doubt also in the field of geomorphology. In short, one can say that the advent of GIS and remote sensing techniques has rolled away the nineteen century's ache encountered in quantitative study of the river basin's characteristics into dungeon of forgetfulness. The morphometric analysis of the River Donga was carried on the SRTM-DEM with 30 meter spatial resolution. ArcGIS-10 software was used for analysis of the Perimeter (P), Basin Area (A), Basin length (Bl) and Stream Length (Lu). The Lu measure by using the ArcGIS software and Arc-Hydrology tool has been used for stream ordering. The studied basin has a dendritic drainage pattern with high drainage texture showing a 7th order stream network. The higher R_b values of the other parts of the catchment (3.69-6.05) and the presence of the elongated shape would give room for a lower and extended peak flow, which will curtail the risk of flooding in major part of the catchment area of river Donga. In summary, the findings of this study will serve as the scientific data base for further detailed hydrological investigation for sustainable water resources management of Kashimbilla dam on this catchment area of this river Donga.

In view of the water resource potential of the basin, which is capable of transforming the socio-economic status of the state, continuous study of the drainage features and assessment of the drainage basin as a fundamental geomorphic unit in water resources development and management cannot be relegated especially as climate change infiltrate and influence every sphere of the globe and sectors of the economy.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Encyclopedia Britannica. "Drainage Basin" Encyclopedia Britannica. Encyclopedia Britannica Ultimate Reference Suite. Chicago: Encyclopedia Britannica; 2012.
2. Singh S, Singh MC. Morphometric analysis of Kanhar river basin, Nat Geographical Journal of India. 1997;43(1):31-43.
3. Strahler AN. Quantitative geomorphology of drainage basins and channel networks. In: Chow VT, (ed.) Handbook of applied hydrology. McGraw-Hill, New York. 1964; 439–476.
4. Swatantra KD, Devesh S, Nitika M. Morphometric analysis of the Banas river basin using the geographical information system, Rajasthan, Indian. Hydrology. 2015;3(5):47-54. DOI: 10.11648/j.hyd.20150305.11
5. National Institute of Hydrology.
6. Ward JV. Changing patterns of land use and basin morphometry: Impacts on stream geomorphology in the Illinois River Basin, Northwest Arkansas, 1941-2004, University of Arkansas, USA; 2007.
7. Pankaj A, Kumar P. GIS based morphometric analysis of five sub-watershed of Song River, Dehradun district, uttarak-hand with special refrence to landslide incidences. Journal of Indian Society of Remote Sensing. 2009;37:157-166.
8. Hajam RA, Hamid A, Ahmad DN, Bhat SU. Morphometric analysis of vishav drainage basin using geo-spatial tecnology (GST). International Research Journal of Geology and Mining. 2013;3(3):136-146.
9. Rama VA. Drainage basin analysis for characterizations of 3rd order watersheds using geograpghic information system (GIS) and ASTER data. Journal of Water Resources and Protection. 2014;4:1042-1050.
10. Ajibade L, Tifabiyi IP, Iroye KA, Ogunteru S. Morphometric analysis of ogunpa and oghere drainage basins, Ibadan, Nigeria. Ethiopia Journal of Environmental Studies and Management. 2010;1:13-19.
11. Eze EB, Effiong J. Morphometric parameters of Calarbar river Basin: Implication for hydrological progress. Journal of Geography and Geology. 2010; 2(1):18-26.
12. Ashaolu ED. The osun drainage basin in the western lithoral hydrological zone of Nigeria: A morphometric study. Malaysian Journal of Society and Space. 2016;12(8): 71–88.
13. Sule BF, Bilewu SO. A morphometric study of five selectede drainage basins in Nigeria. FuLafia Journal of Science & Technology. 2017;3(1).
14. Adebayo AA, Bashir BA. Hydrology and water resources. In Tukur AL, Adebayo AA, Galtima M (Ed.). The land and People of the Mambilla Plateau; 2005.
15. Adelalu TG. Rainfall analysis and flood hazard vulnerability assessment along major tributaries to River Benue in Taraba. Unpublished PhD. dissertation submitted to Department of Geography, School of Environmental Science, Modibbo Adama University of Technology, Yola in partial fulfillment of the requirement for the award of Doctorate degree (Ph.D) in Climatology; 2018.
16. Storm Water drainage Manual Government of Minnesota; 2014.
17. Horton RE. Erosional development of streams and their drainage basins: Hydrophysical approach to quantitative morphology, Bull. Geol. Soc. America Bulletin. 1945;56(3):275-370.
18. Schumm SA. The evolution of drainage systems and slopes in badlands at Perth Amboi, New Jersey. Geological Society of America Bulletins. 1956;67(5):597-646.
19. Horton RE. Drainage-basin characteristics. Trans. Am. Geophys. Union. 1932;13:350-361.
20. Miller VC. A quantitative geomorphic study of drainage basin characteristics on the clinch mountain area, Virginia and Tennessee, Proj. NR 389-402, Tech. Rep. 3, Columbia University, Department of Geology, Office of Naval Research, New York;1953.
21. Faniran A, Ojo O. Man's physical environment. Heinemann Rducational Books, London. 1980;404.
22. Strahler AN. Quantitative analysis of watershed geomorphology. Trans Am Geophys Union. 1957;38:913–920.
23. Melton MA. An analysis of the relations among elements of climate, Surface properties and geomorphology, project NR 389042, Tech. Rep. 11, Columbia University; 1957.
24. Nicholas JE, Folorunsho JO, Jeb DN. Assessment of rainfall-induced flooding using the soil conservation service curve number method and geographic information system in Mararaba, Nasarawa

- State, Nigeria. International Conference; 2015.
25. Ajaegbu HI, Faniran A. A new approach to practical work in geography. Heinemann Educational Books (Nigeria) Plc; 1992.
 26. Kale VC, Gupta A. Introduction to geomorphology, New Delhi: Academic (India) Publishers; 2001.
 27. Cooray PG. An introduction to geology of Sri Lanka (Ceylon), National Museums of Sri Lanka Publication, Colombo; 1984.
 28. Chorley RJ, Donald Malm EG, Pogorzelski HA. A new standard for estimating drainage basin shape. American Journal Science. 1957;255:138-141.
 29. Hugget RJ. Fundamentals of geomorphology. London, New York, Routledge; 2003.
 30. Nag SK. Morphometric analysis using remote sensing technique in the Chaka Sub-Basin, Purulia District, West Bengal. J. Indian Soc. Remote Sensing. 1998; 26(1-2):69-76
 31. Gabriel, Audu. Land use and its implication on natural environment of donga LGA, Nigeria. Physical Science International Journal. Science Domain; 2017.
 32. Withanage NS, Dayawansa NDK, De Silva RP. Morphometric analysis of the gal oya river basin using spatial data derived from GIS. Tropical Agricultural Research. 2014; 26(1):175-188.
 33. Nageswara RK, Swarna LP, Arun KP, Hari K. Morphometric analysis of Gostani river basin in Andra Pradesh State, India using spatial information technology. International Journal of Geomatics and Geosciences. 2010;1(2):179-187.
 34. Mishra A, Dubey DP, Tiwari RN. Morphometric analysis of tons basin, Rewa District, Madhya Pradesh, Based on Watershed Approach. Earth Science India. 2011;4(III):171-180.
 35. Singh P, Gupta A, Singh, M. Hydrological inferences from watershed analysis for water resources management using remote sensing and GIS techniques. Egyptian Journal of Remote Sensing and Space Sciences. 2014;17(2):111-121.
 36. Ashaolu ED. The osun drainage basin in the western lithoral hydrological zone of Nigeria: A morphometric study. Malaysian Journal of Society and Space. 2016;12(8): 71-88.

© 2019 Gabriel et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

*The peer review history for this paper can be accessed here:
<http://www.sdiarticle3.com/review-history/48219>*